

G308

- Extreme compact multidesign enclosure
- Wide coverage angles
- 1" patented compression driver
- Multiple fly-points for easy hanging
- 8 Ohms or 16 Ohms versions
- Extended accessories range for both touring and installation


The Coda Audio G308 is a compact versatile full range 2-way loudspeaker system that features an 8" ultra low distortion low frequency driver and a 1" compression driver coupled to a 90° conical wood waveguide.

The G308 incorporates a multidesign enclosure fitted with M6 flying points enabling it to be used horizontal, vertical or as a floor monitor.



SYSTEM COMPONENTS:
 AC24 Analogue Controller
 C25 Amplifier
 PW112
 PW118
 GSB15

ACCESSORIES:

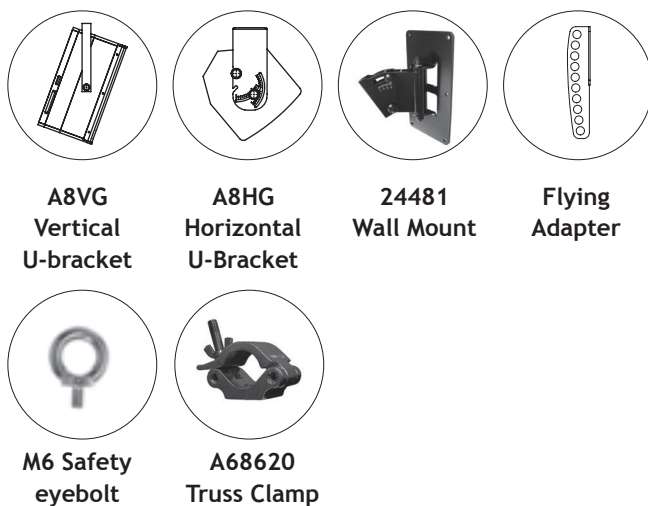

TECHNICAL SPECIFICATIONS	
Type:	2-way full range system, multidesign enclosure
Application:	High quality short throw
Frequency response:	70 Hz - 30 kHz (-3 dB)
Power handling AES:	220 W
Program power:	440 W
Peak power:	880 W
Sensitivity:	94.5 dB
Max. SPL peak:	124 dB
Dispersion:	90° conical
Components:	
Low frequency:	8" ultra low distortion cone driver, 2" voice coil
High frequency:	1" compression driver, 1.5" voice coil
Crossover point:	1900 Hz
Nominal impedance:	8 Ω or 16 Ω
Input connectors:	2x Neutrik™ NL4MP
Enclosure material:	Birch plywood
Suspension:	2x M6 threaded points
Dimensions (WxHxD):	230x470x265 mm
Net weight:	9.5 kg
	Human EQ-switch

installation + portable

passive