


G715-96

- 3-way high output versatile full range system
- Unique 1.4" coaxial neodymium driver
- 90° x 60° rotatable elliptical waveguide
- 15" neodymium ultra low distortion woofer
- Passive or bi-amplified operation
- Designed for fixed installation, touring and stage monitoring

The Coda Audio G715-96 is a versatile full range 3-way loudspeaker system that features a high power 15" neodymium woofer and a 1.4" coaxial neodymium driver coupled to a rotatable 90° x 60° elliptical waveguide. As a 3-way system the G715-96 may be driven passively or with bi-amplification to provide extremely high acoustic output.


The Audio G715-96 is a powerful solution for front of house touring, installed PA for theatres, clubs and corporate events or as a stage monitor.

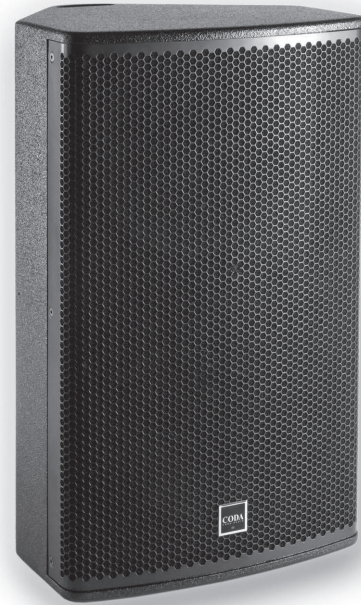


installation + portable

passive

ACCESSORIES:




A15VG
Vertical
U-bracket



A15HG
Horizontal
U-bracket



24481
Wall mount



Flying
adapter



M6 Safety
eyebolt

SYSTEM COMPONENTS:

DNC260 Digital Controller
AC24 Analogue Controller
C25 Amplifier
PW118
PW418

TECHNICAL SPECIFICATIONS

Type:	3-way high power full range system, multi design enclosure
Application:	High output short/medium throw or stage monitor
Frequency response:	50 Hz - 21 kHz (-3 dB)
Power handling AES:	1000 W
Peak power:	4000 W
Sensitivity:	98 dB
Max. SPL peak:	134 dB
Dispersion:	90° x 60°
Components:	
Low frequency:	15" neodymium woofer, 4" (101.6 mm) voice coil, 1000 W (AES)
High frequency:	1.4" neodymium coaxial driver, 3.5" (90 mm) + 1.75" (44.4 mm) voice coil, 150 W + 80 W (AES)
Crossover point:	750 Hz, 6.3 kHz passive
Nominal impedance:	8 Ω
Input connectors:	2 x Neutrik™ NL4MP
Suspension:	6 x M6 threaded points
Enclosure material:	15 / 18 mm Baltic birch plywood
Finish:	Textured black paint (all RAL-colours optional)
Dimensions (WxHxD):	420x700x380 mm
Net weight:	24.5 kg
Weatherproof version:	Optional